

Fig. 1

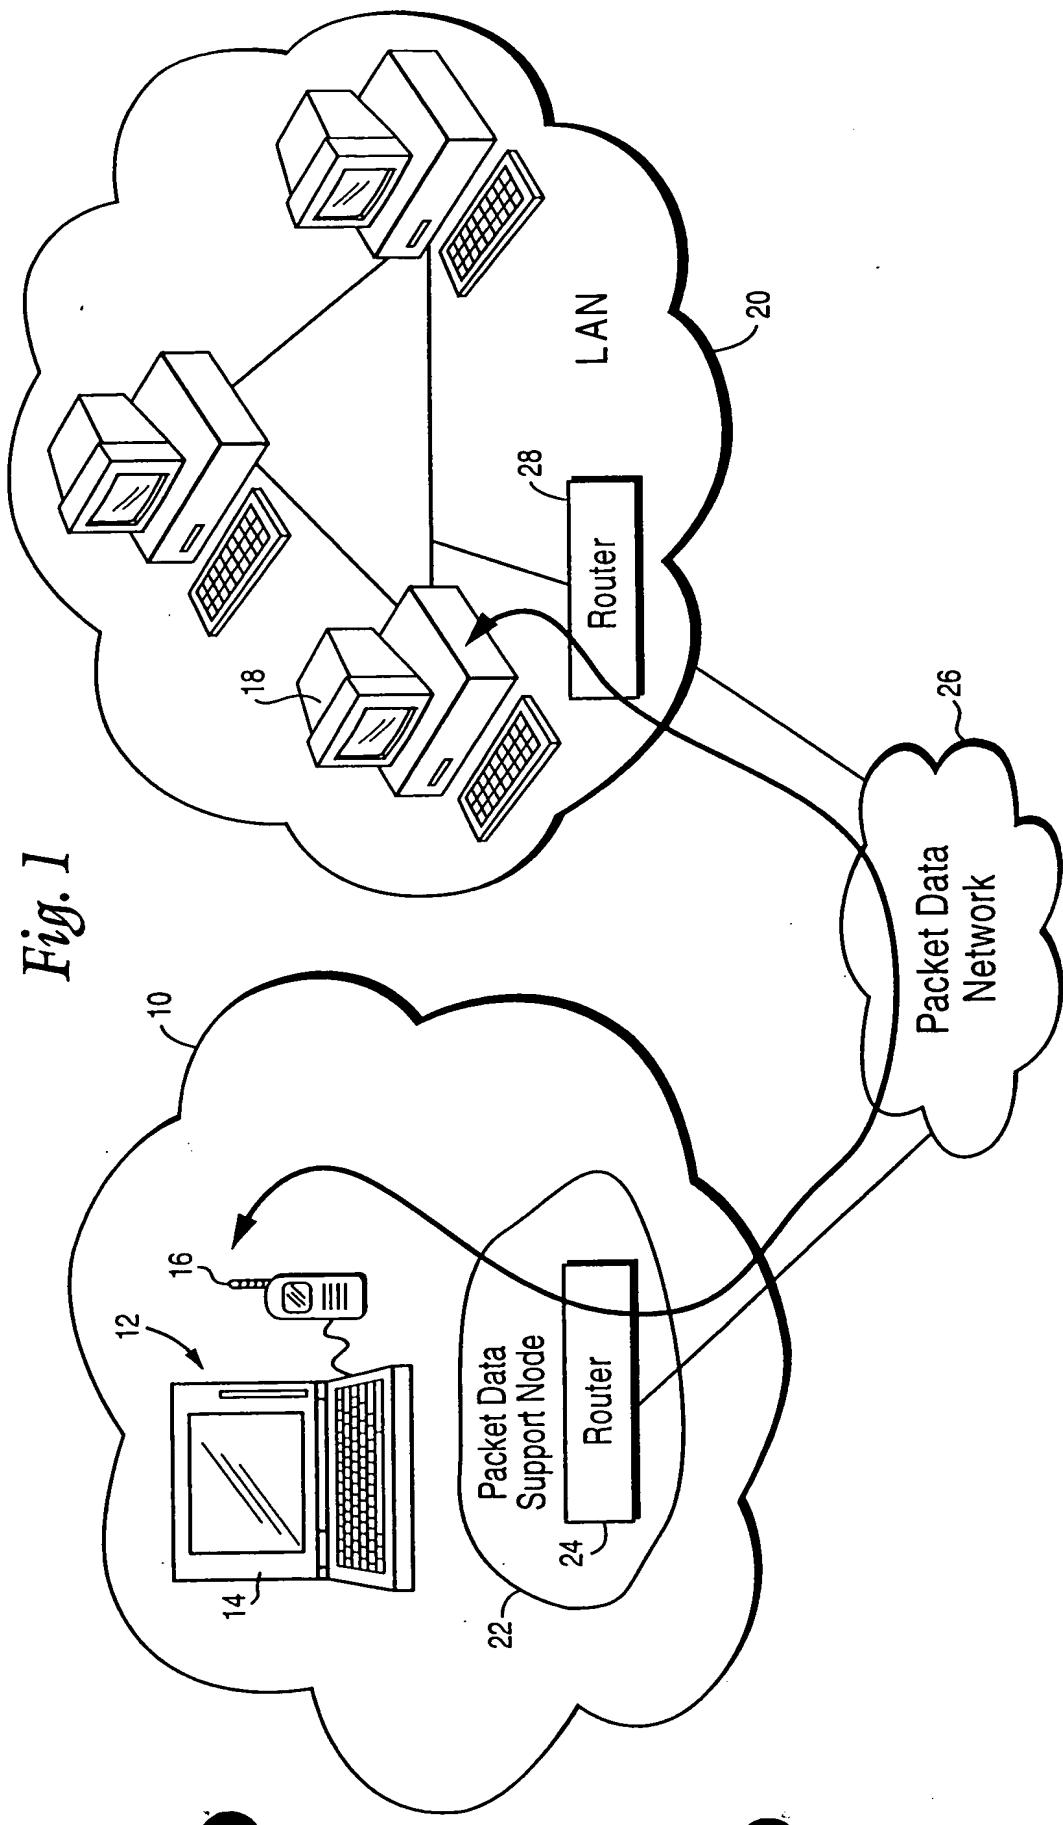
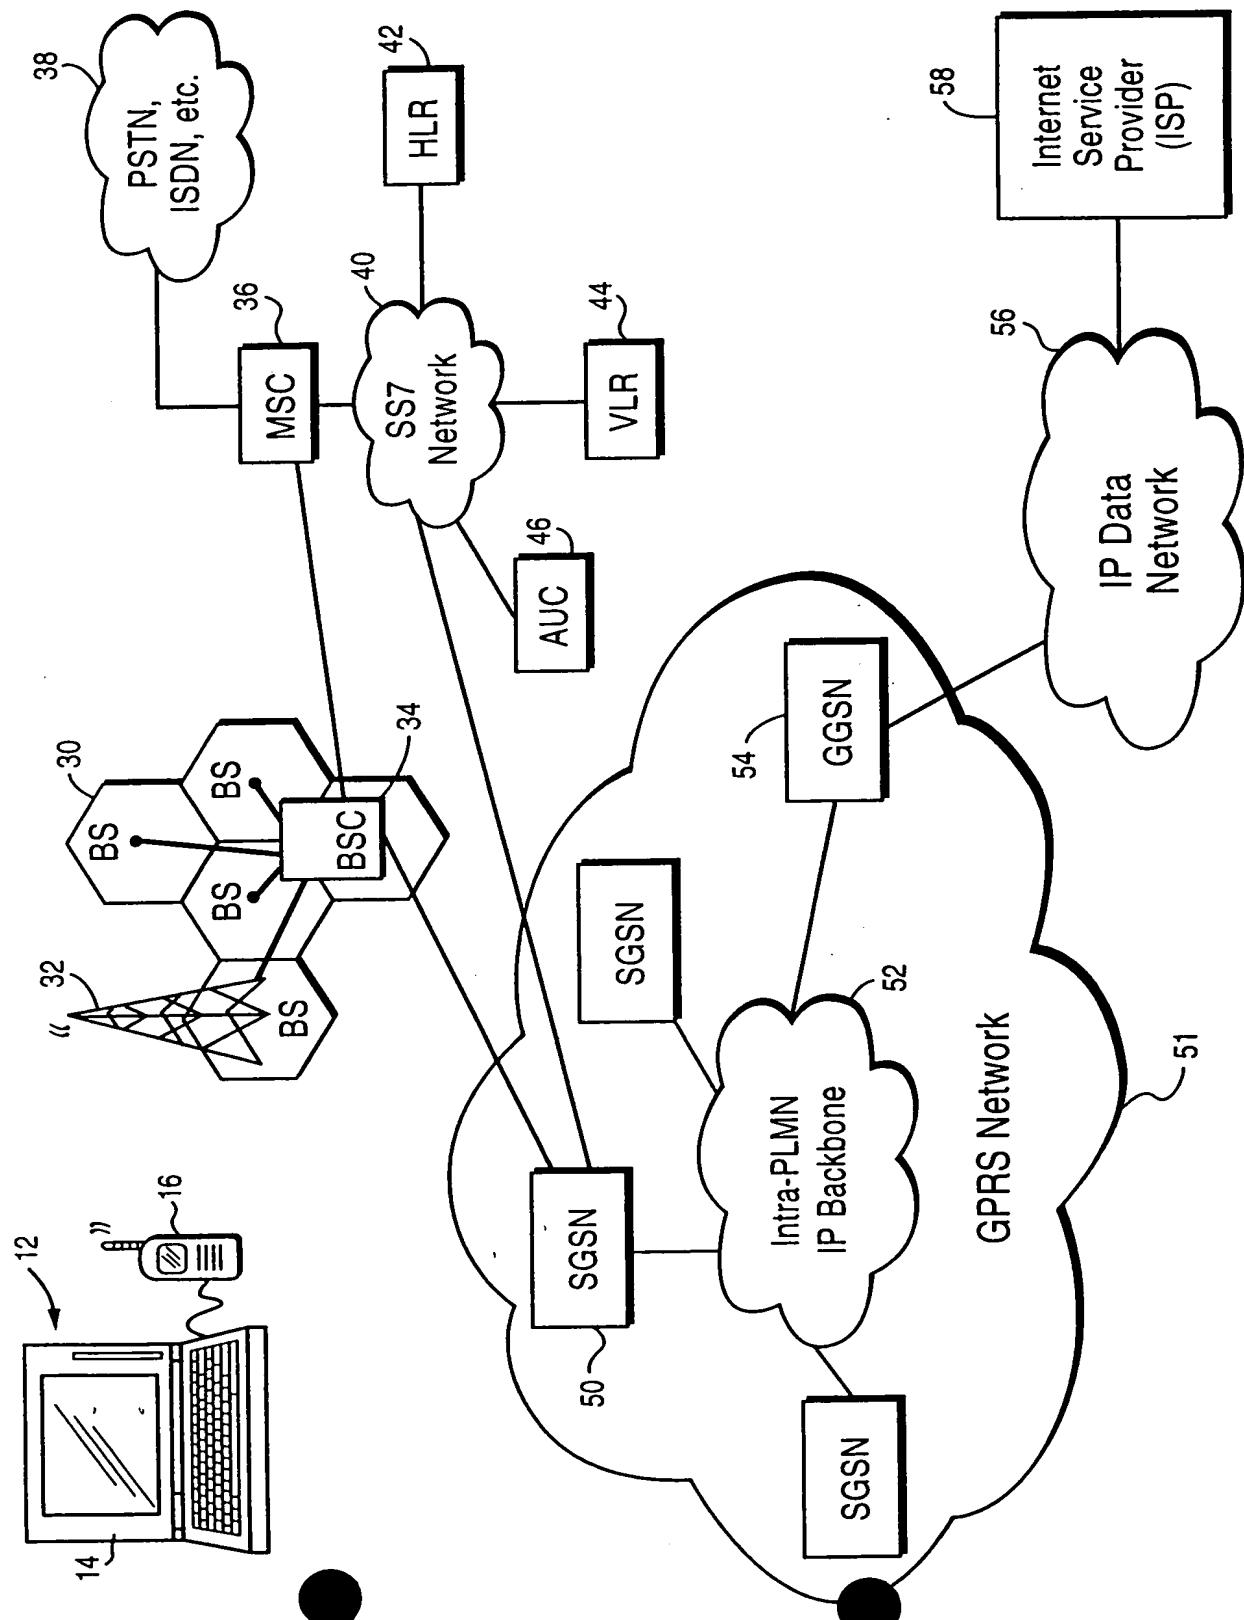


Fig. 2



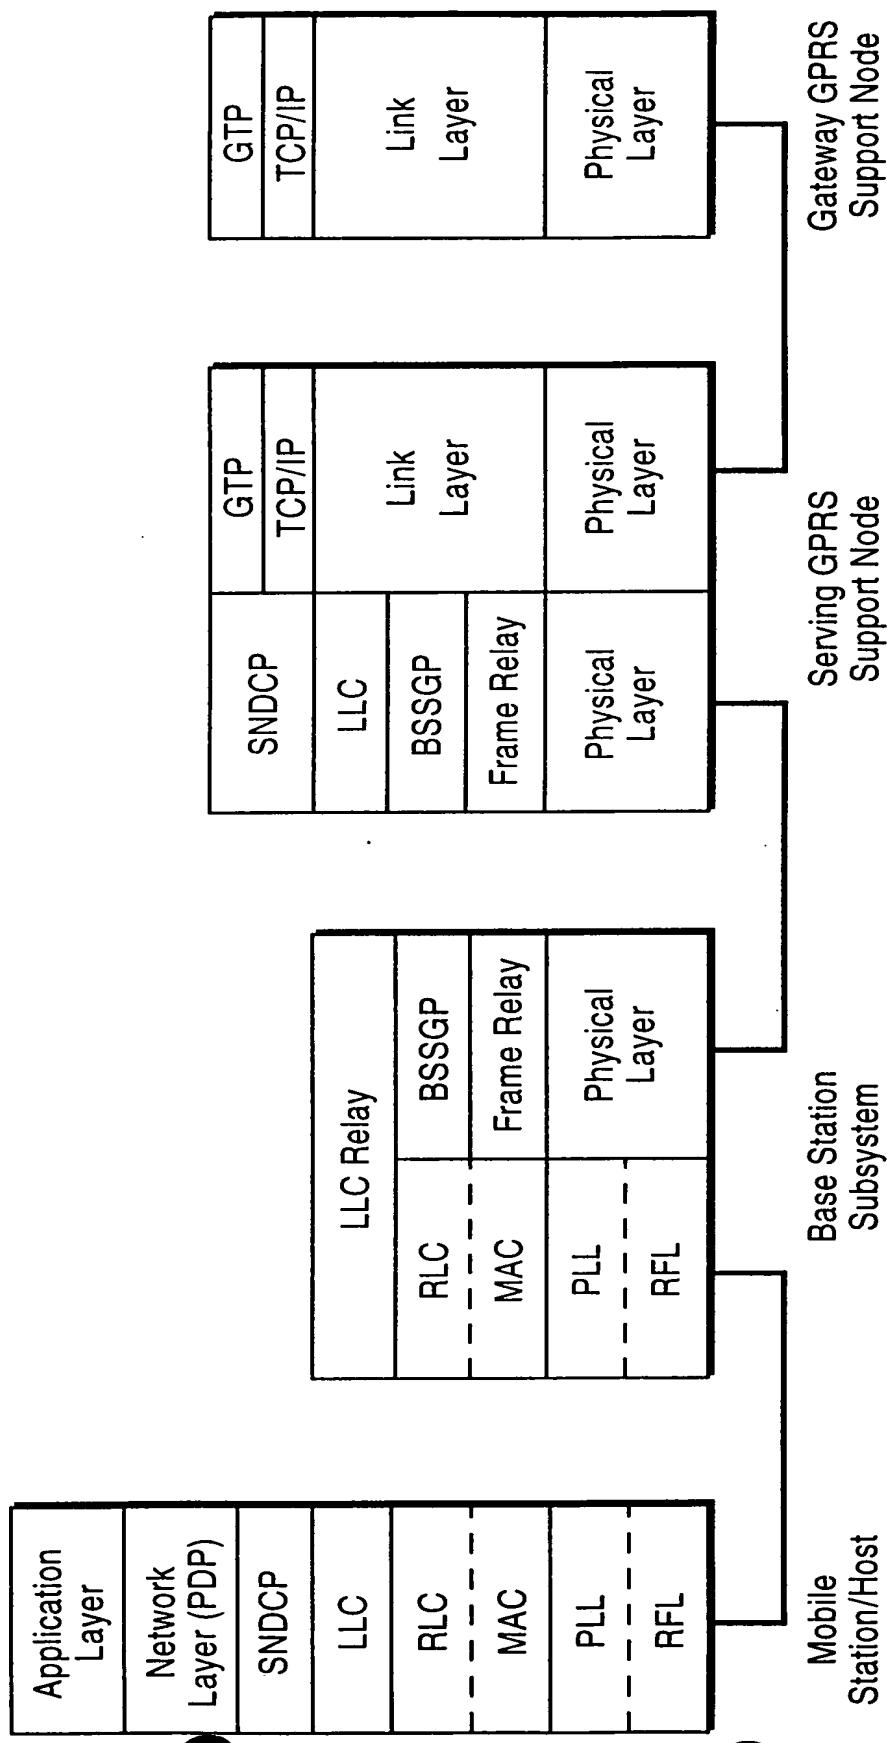


Fig. 3

Fig. 4

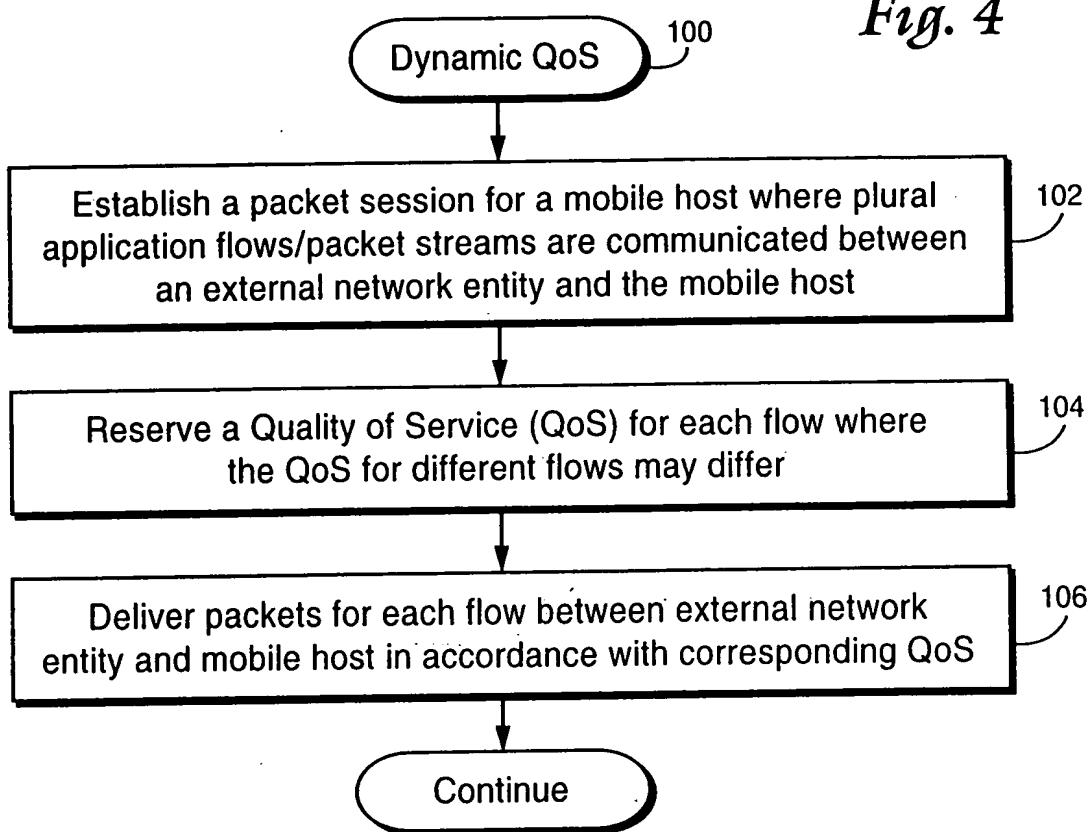


Fig. 5


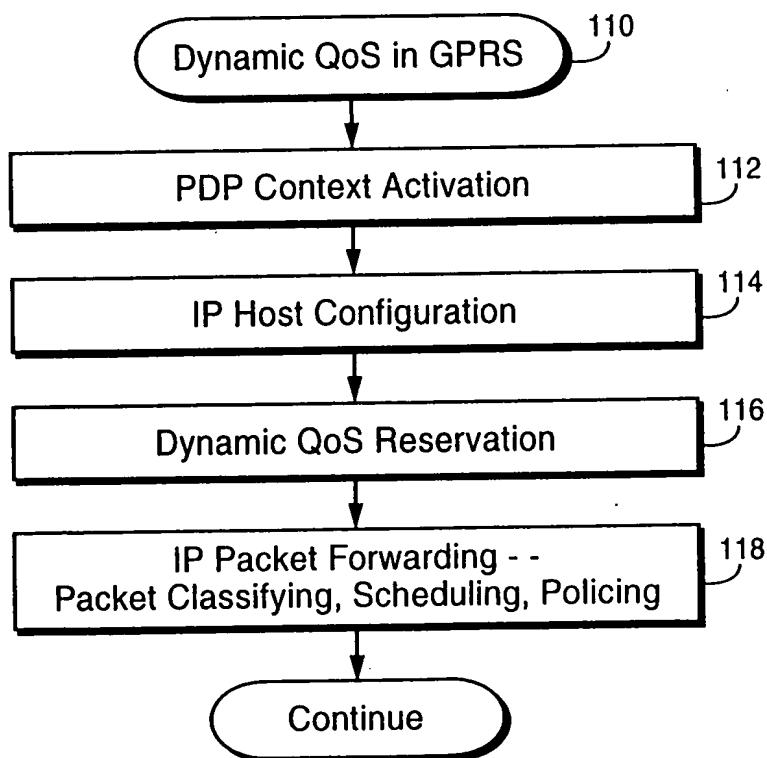



Fig. 6

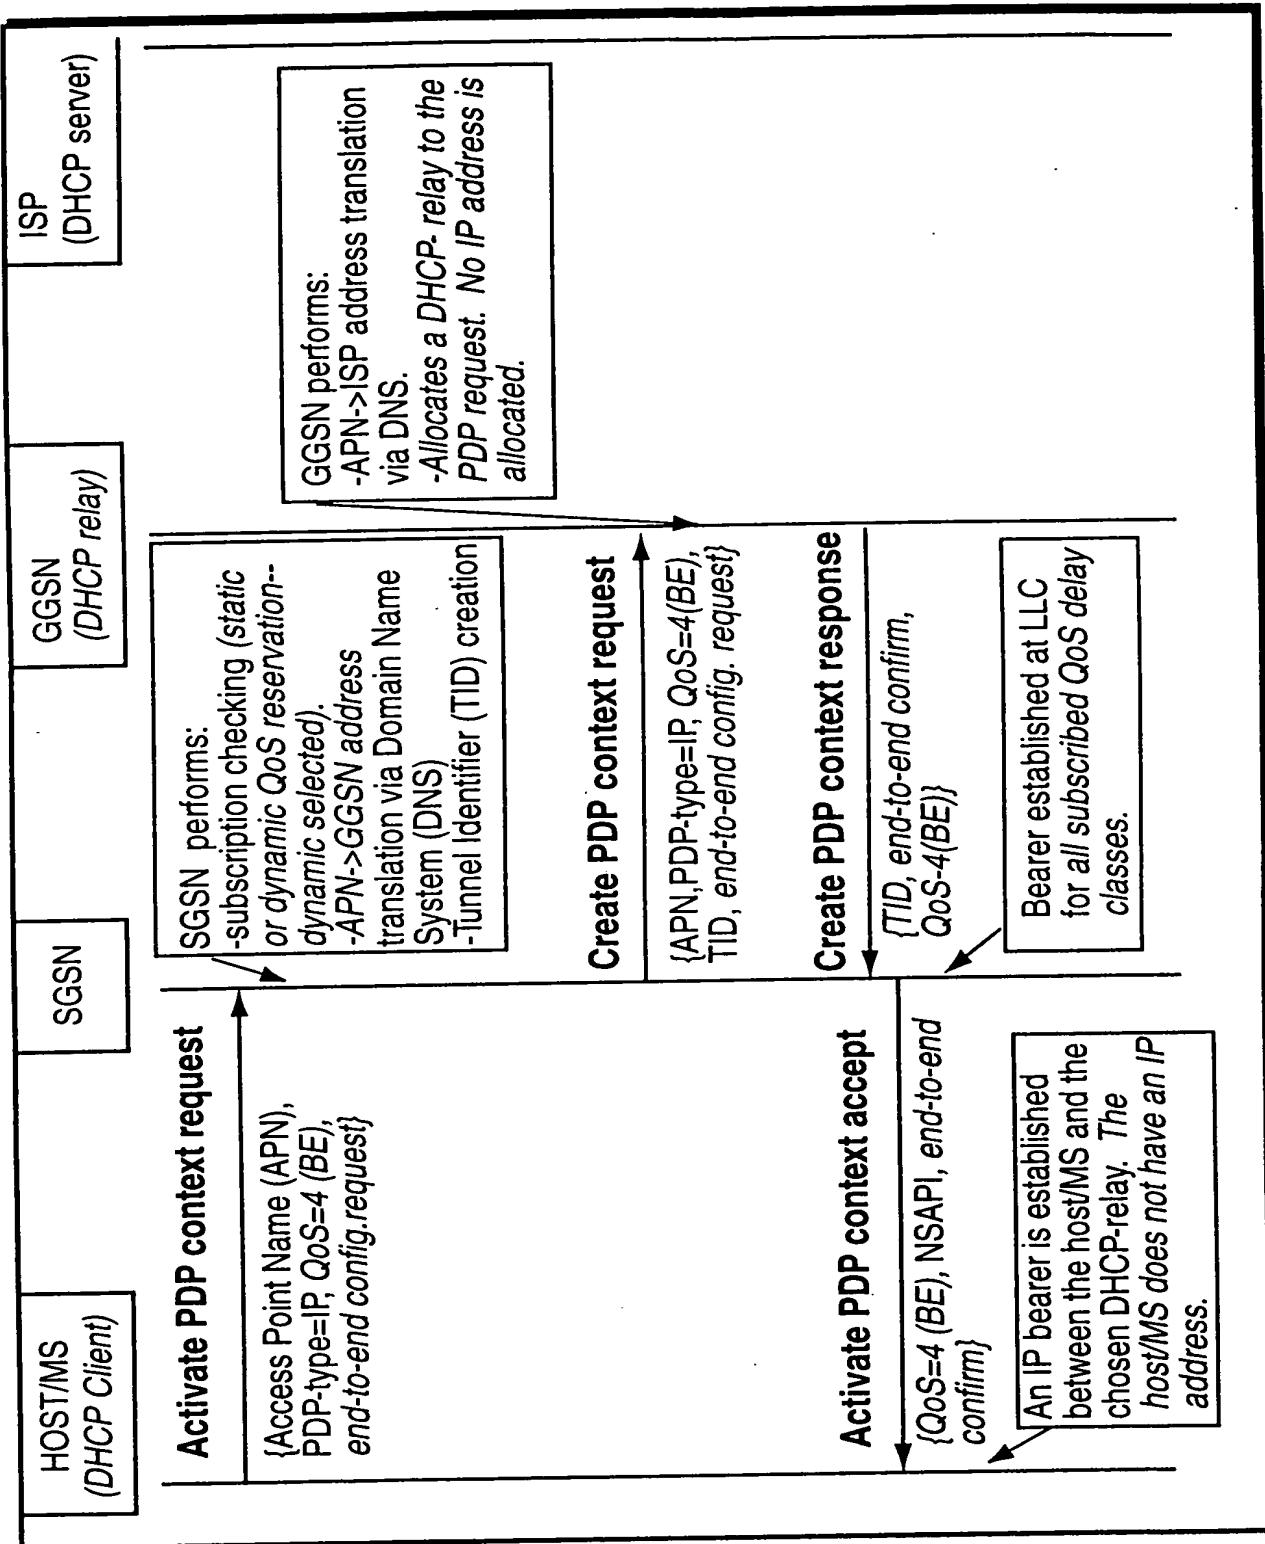

Signalling Sequence for IP Host Configuration.

卷之三

Fig. 7

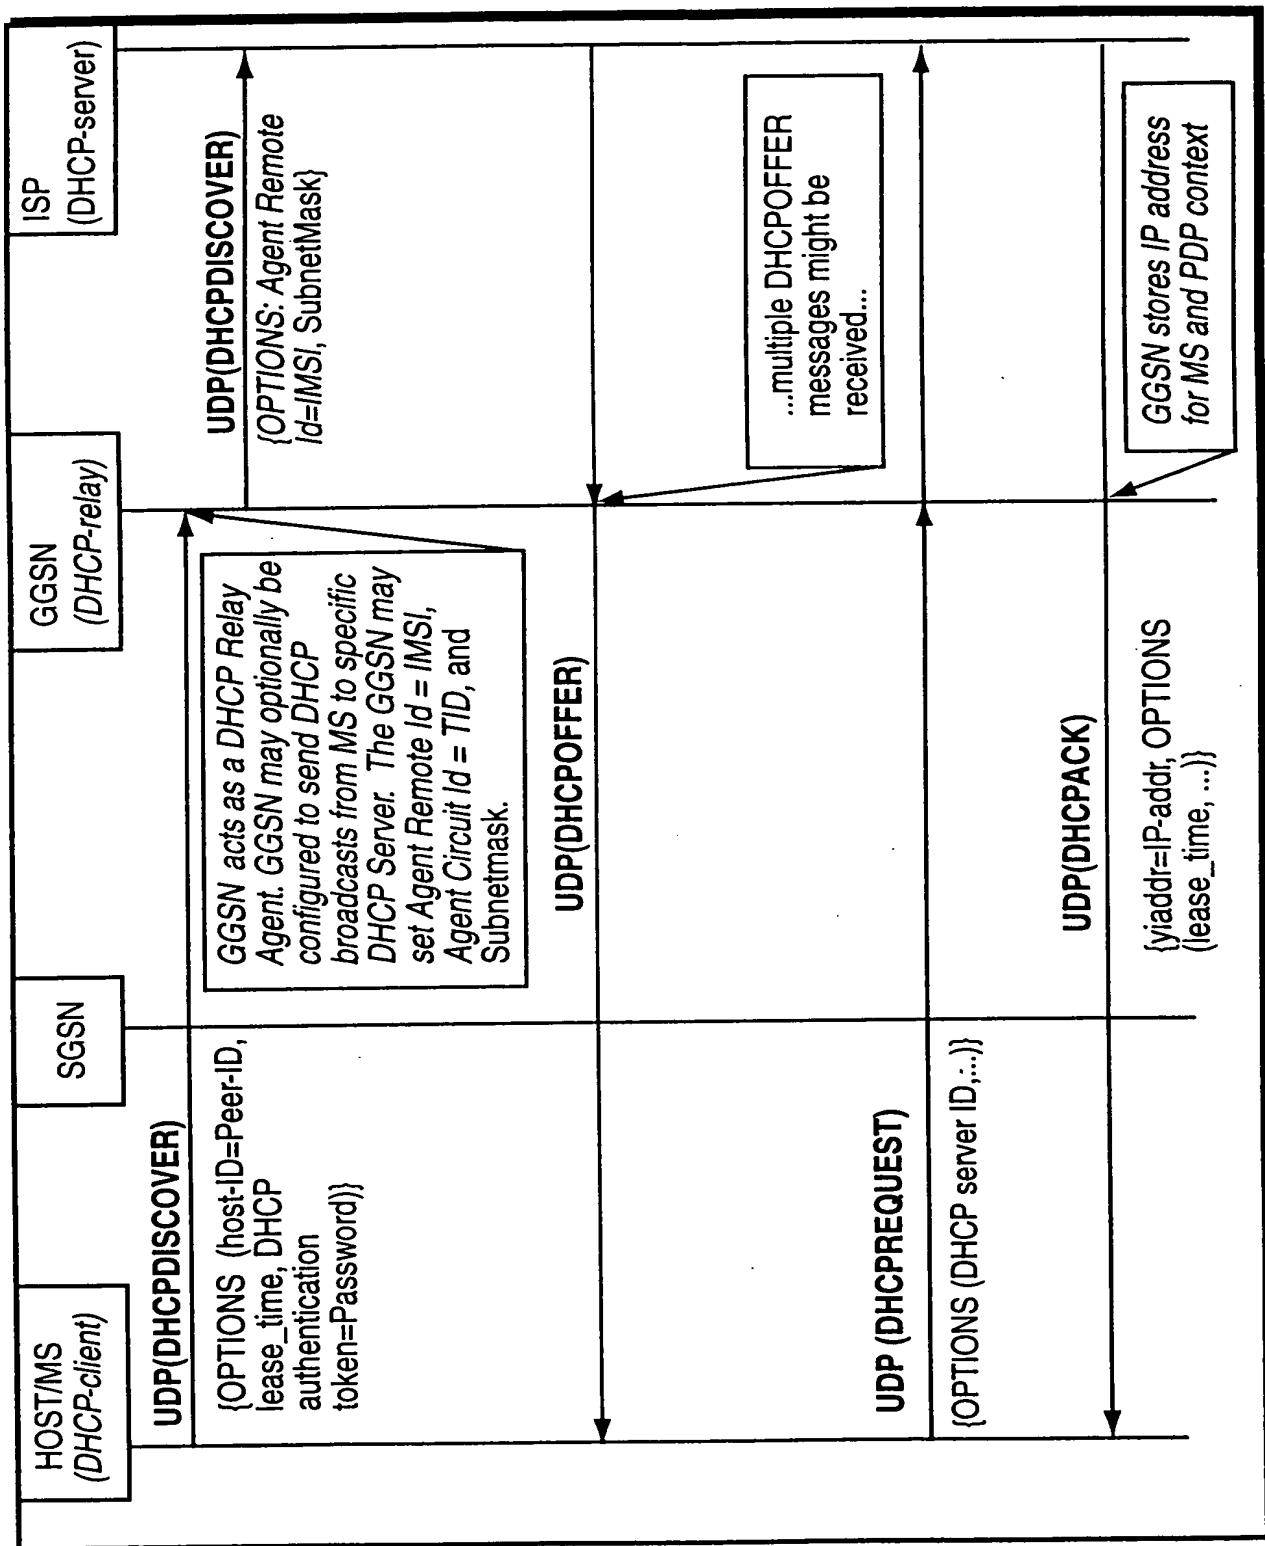

Signalling Sequence for IP Host Configuration

Fig. 8

QoS Reservation: Mobile Terminating Traffic Case.



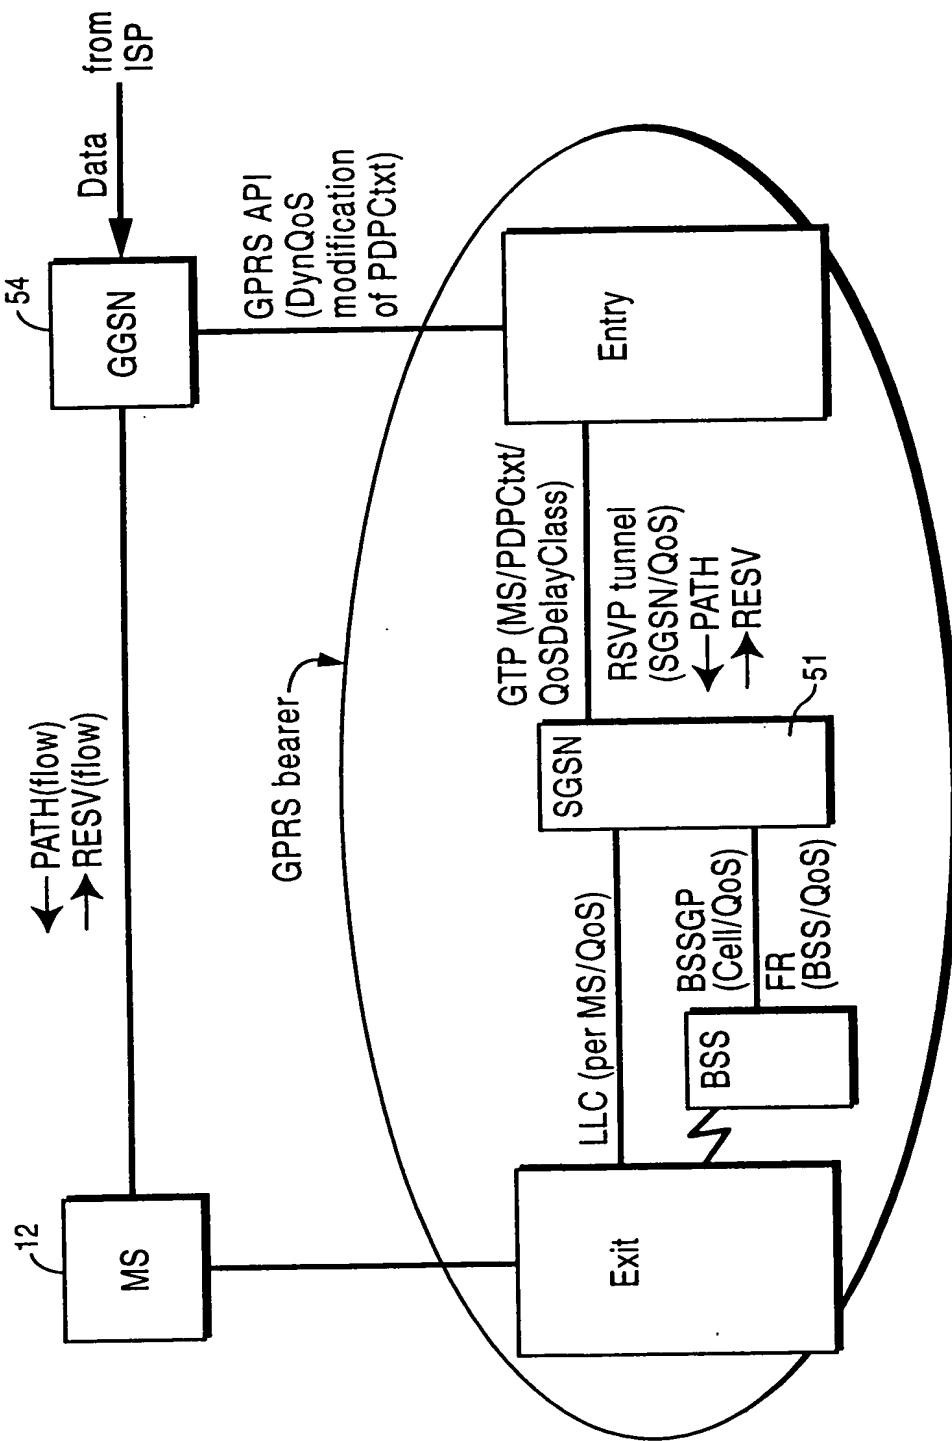


Fig. 9

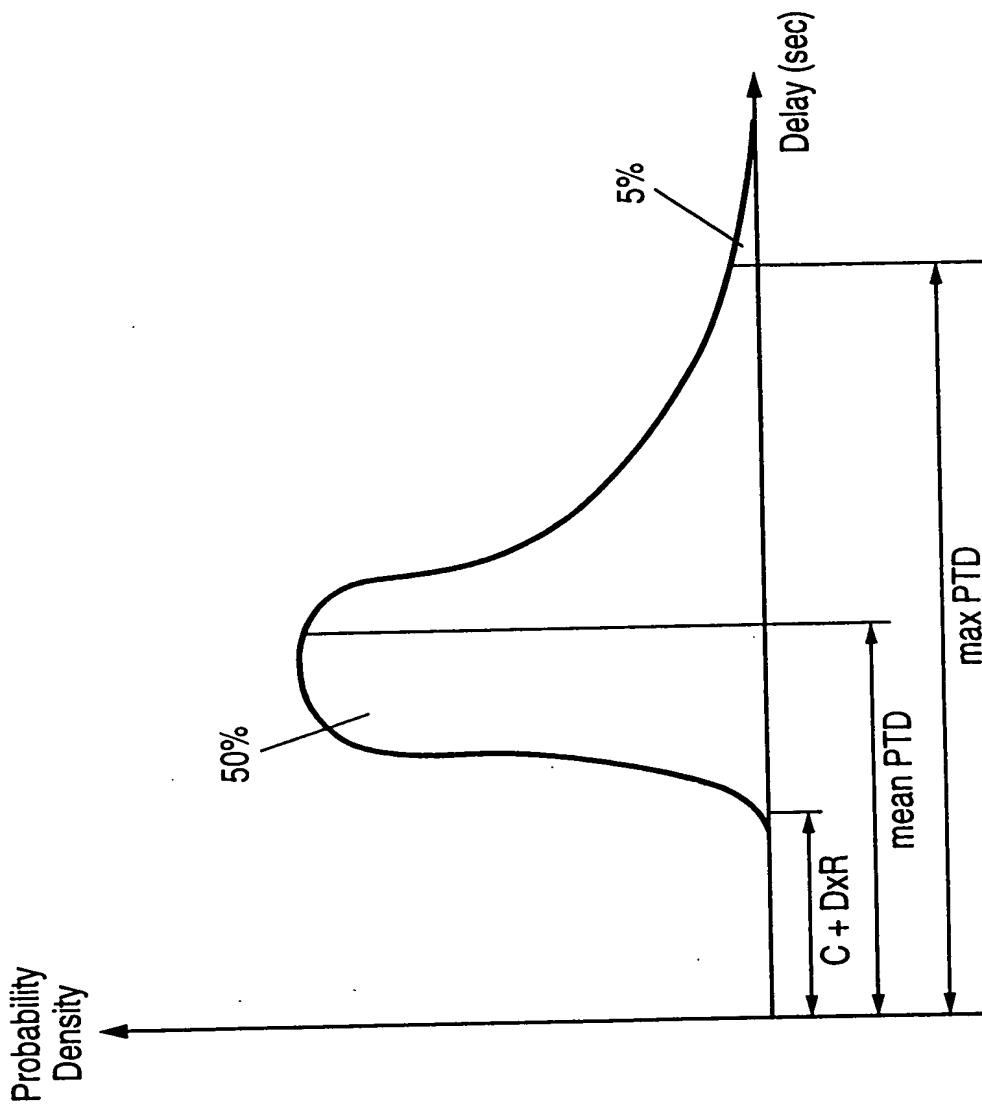

Delay Probability Definitions for the GPRS bearer.

Fig. 10A

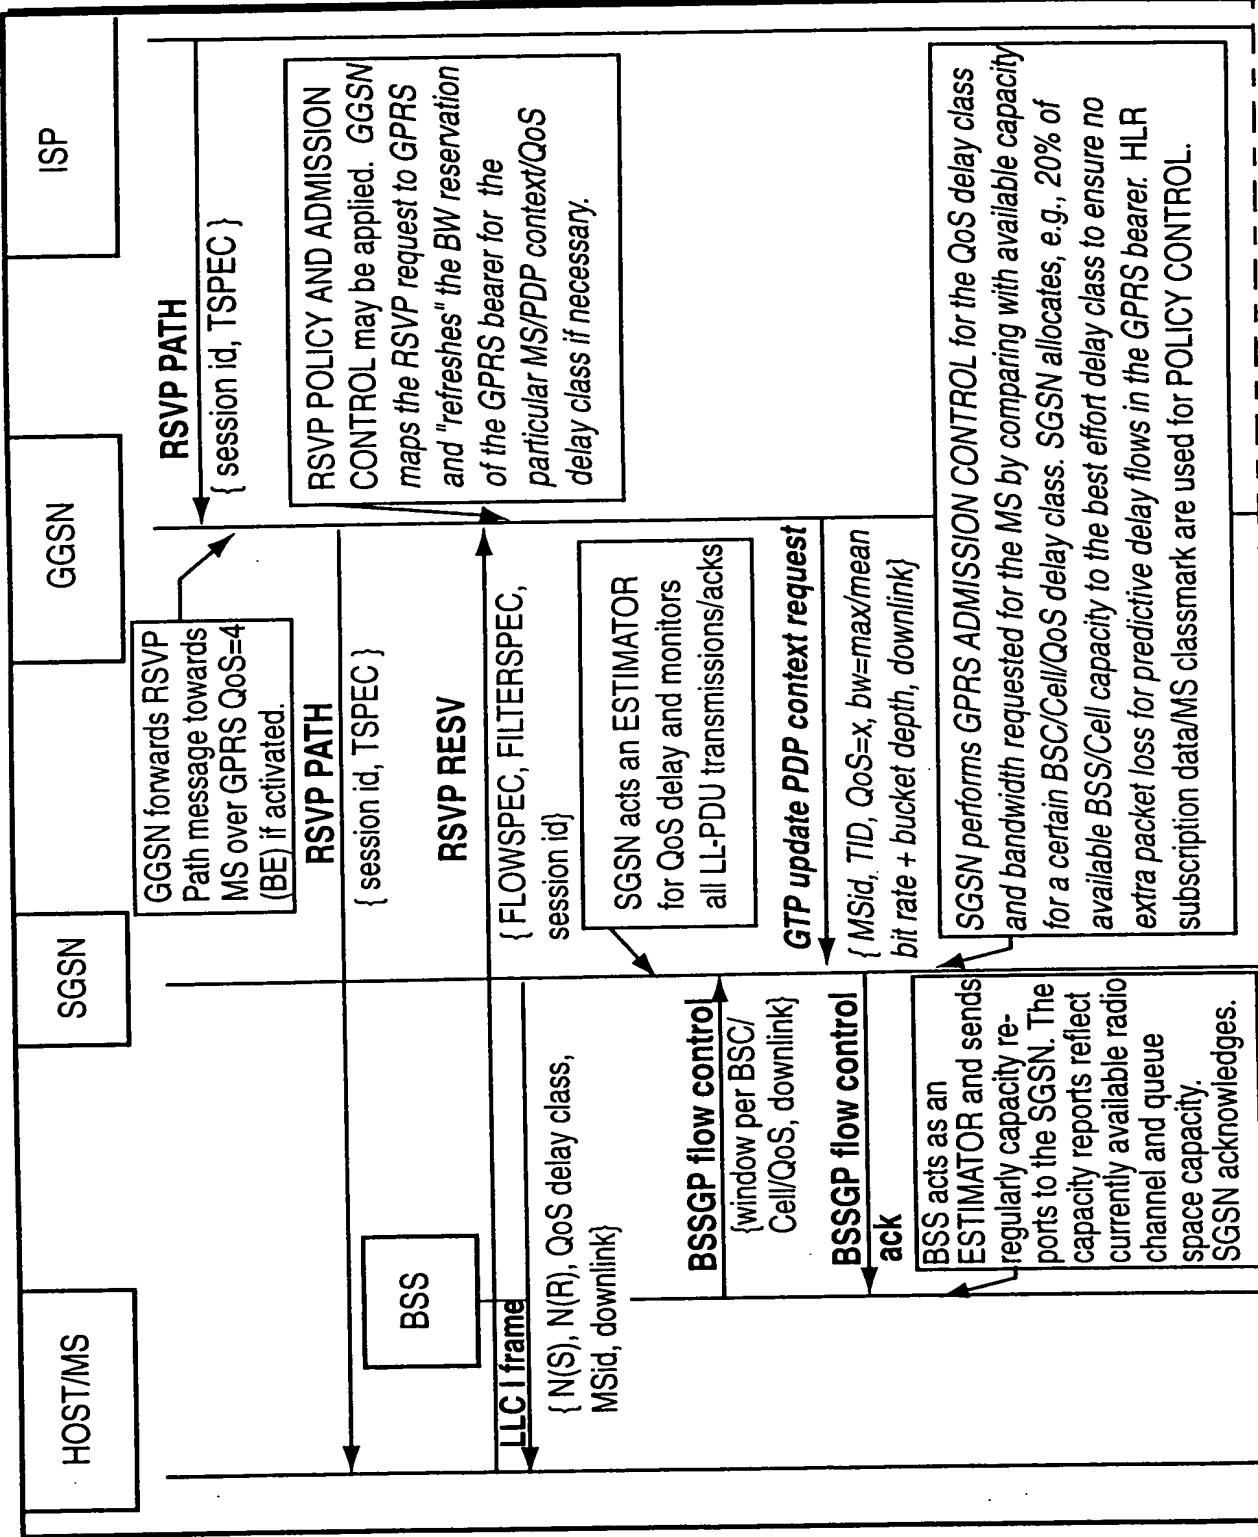

To Fig. 10B

Fig. 10B

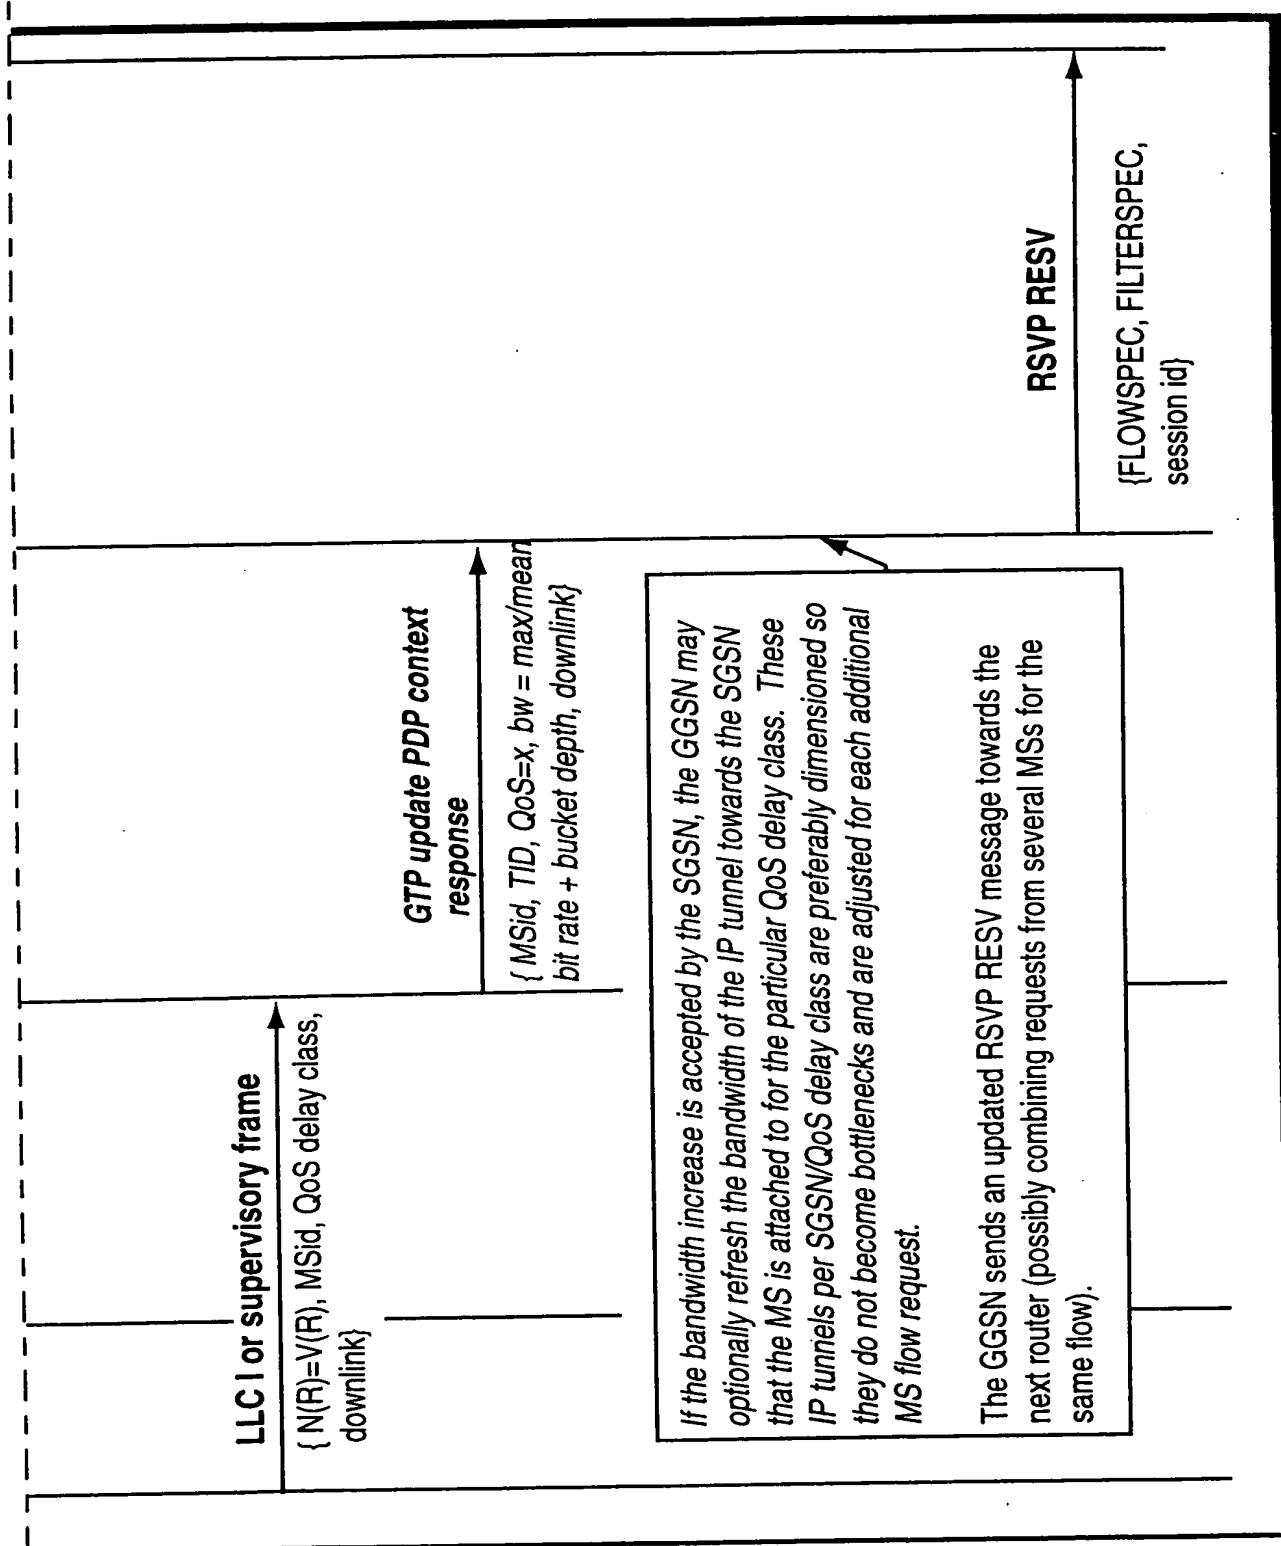
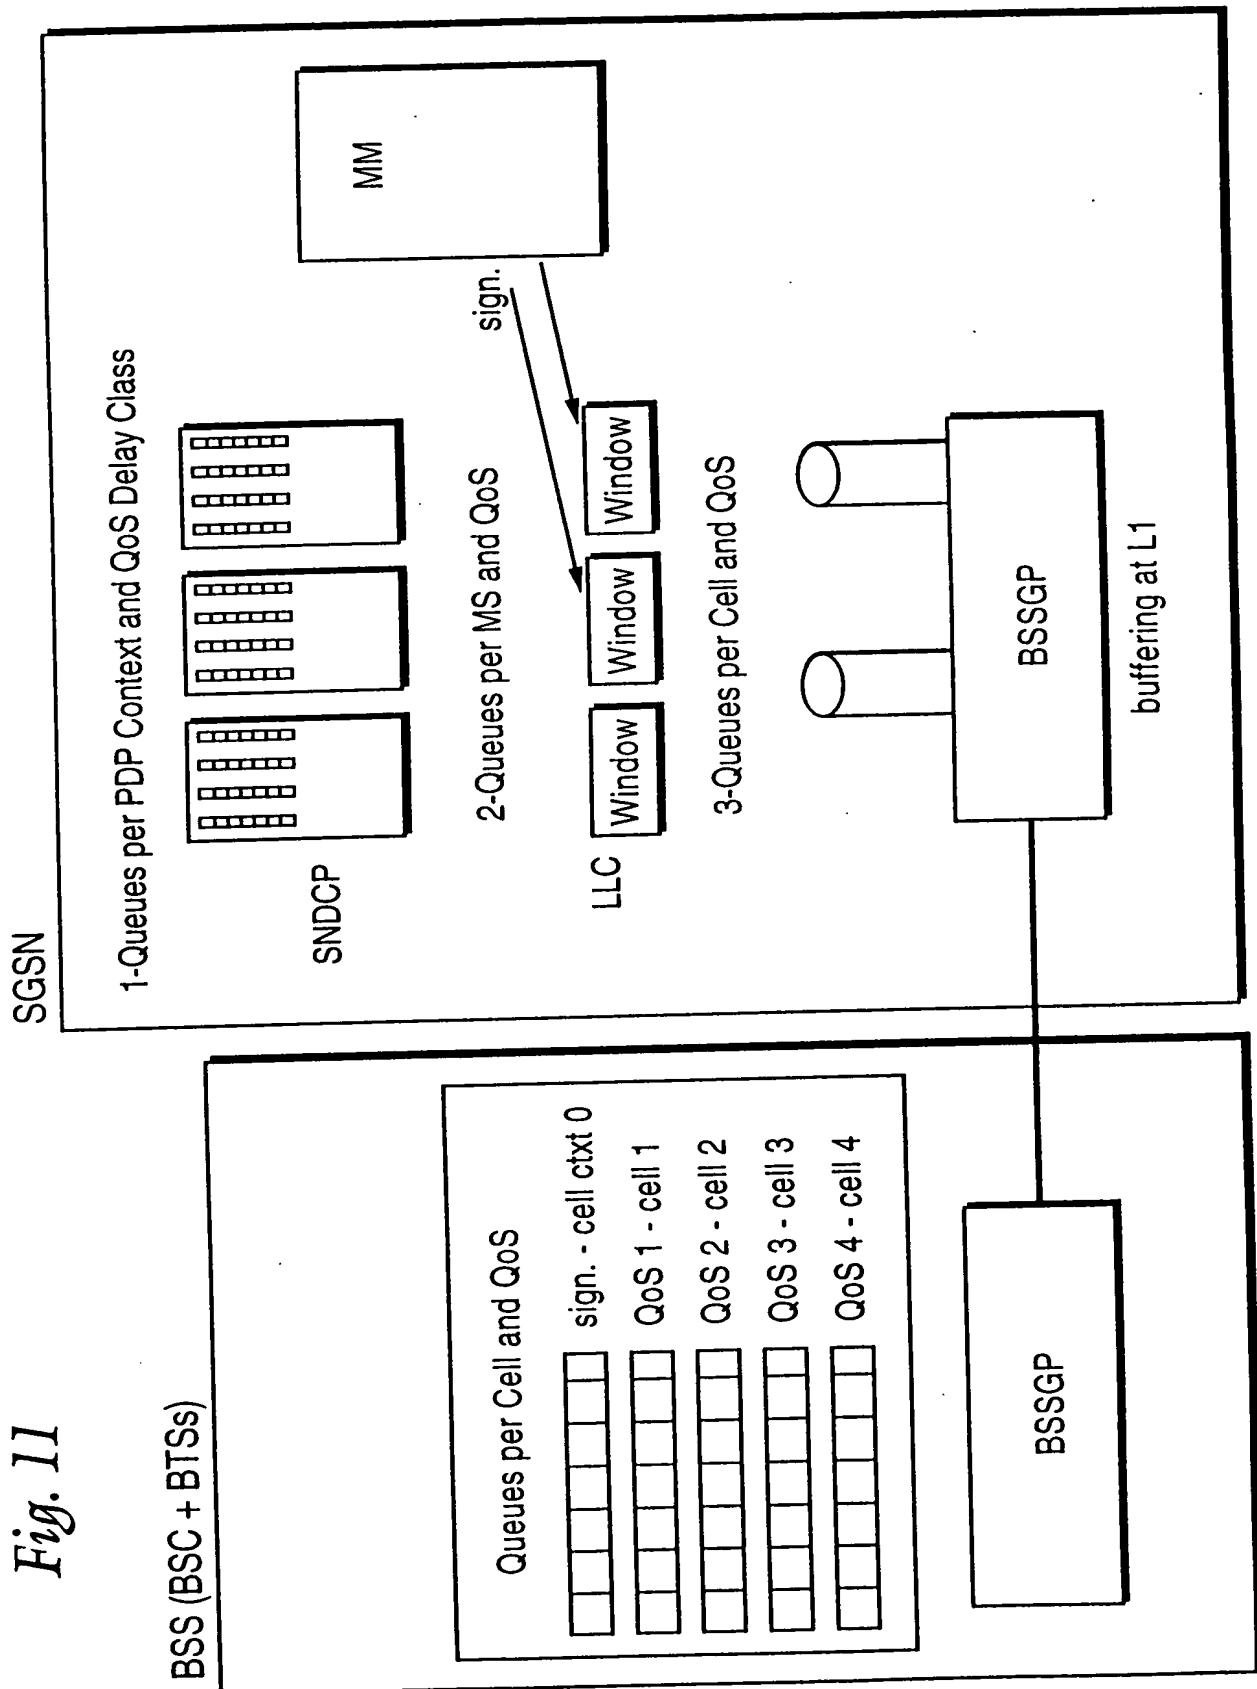


Fig. 11



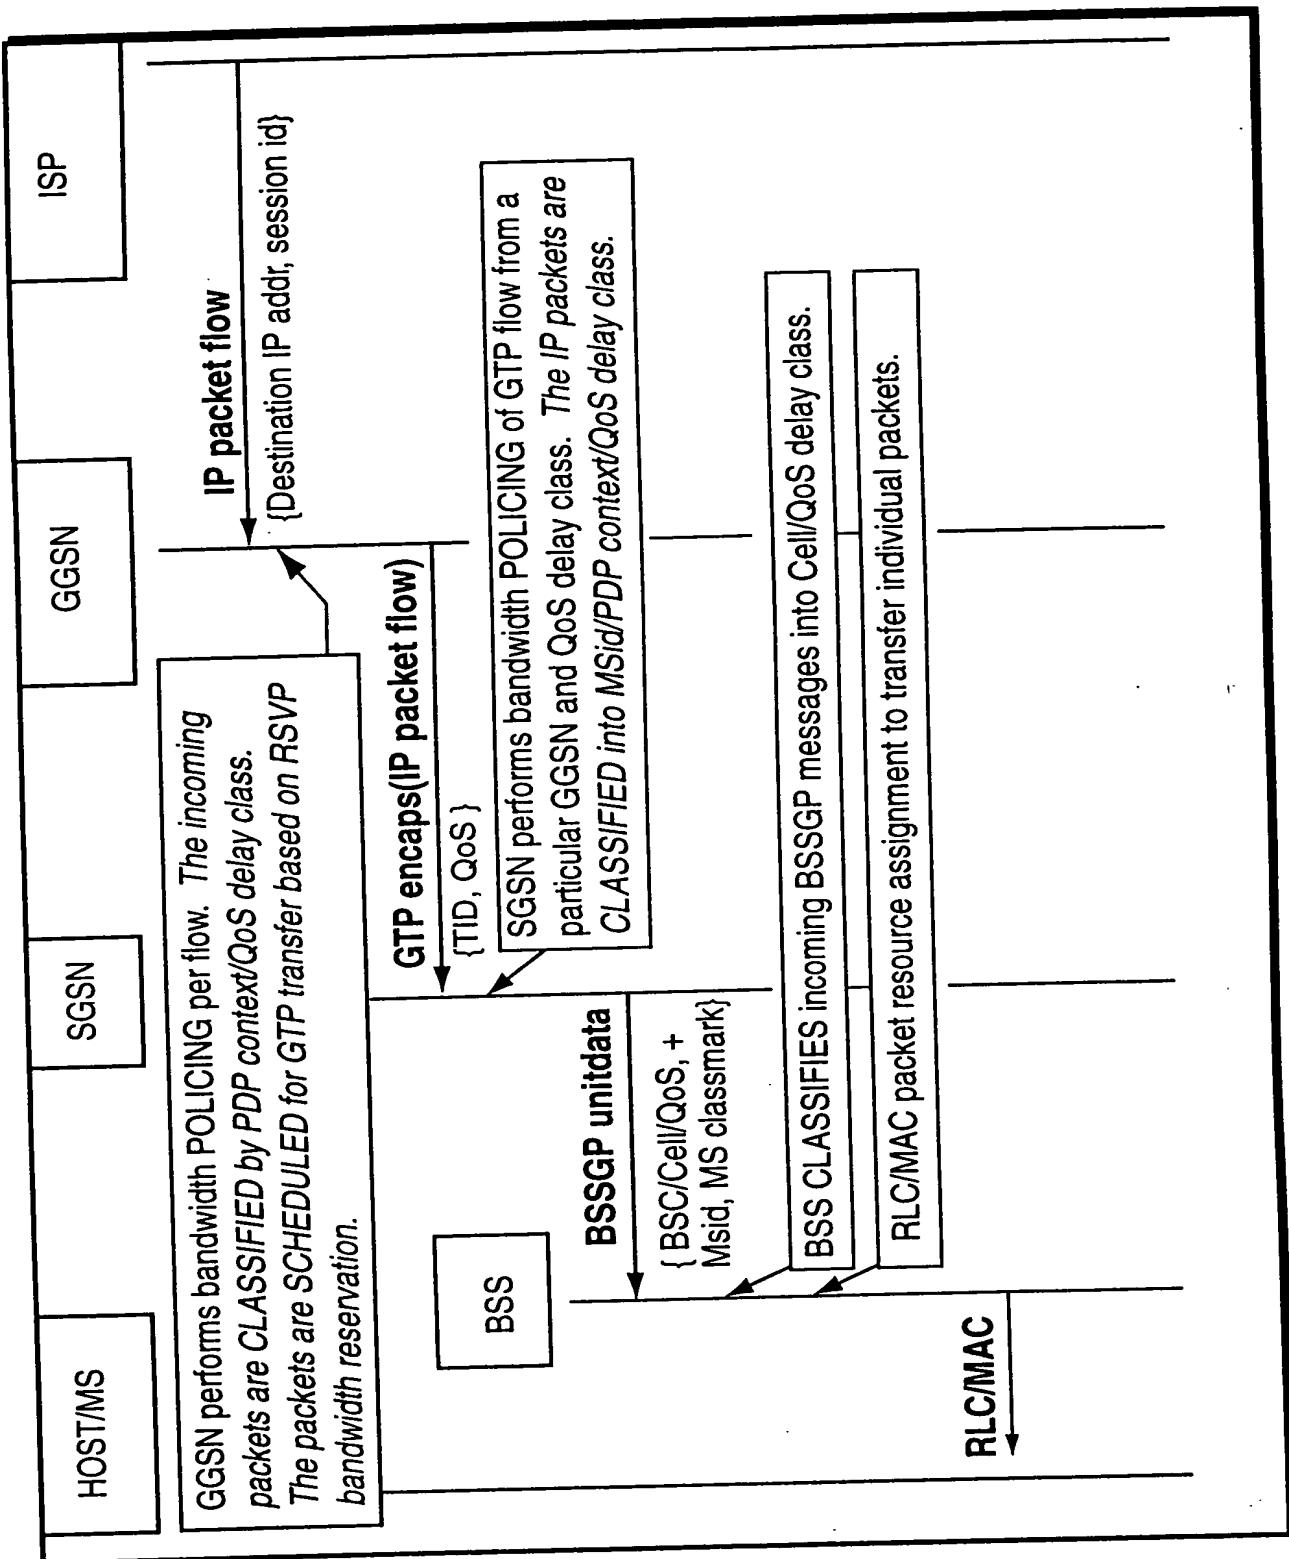


Fig. 13

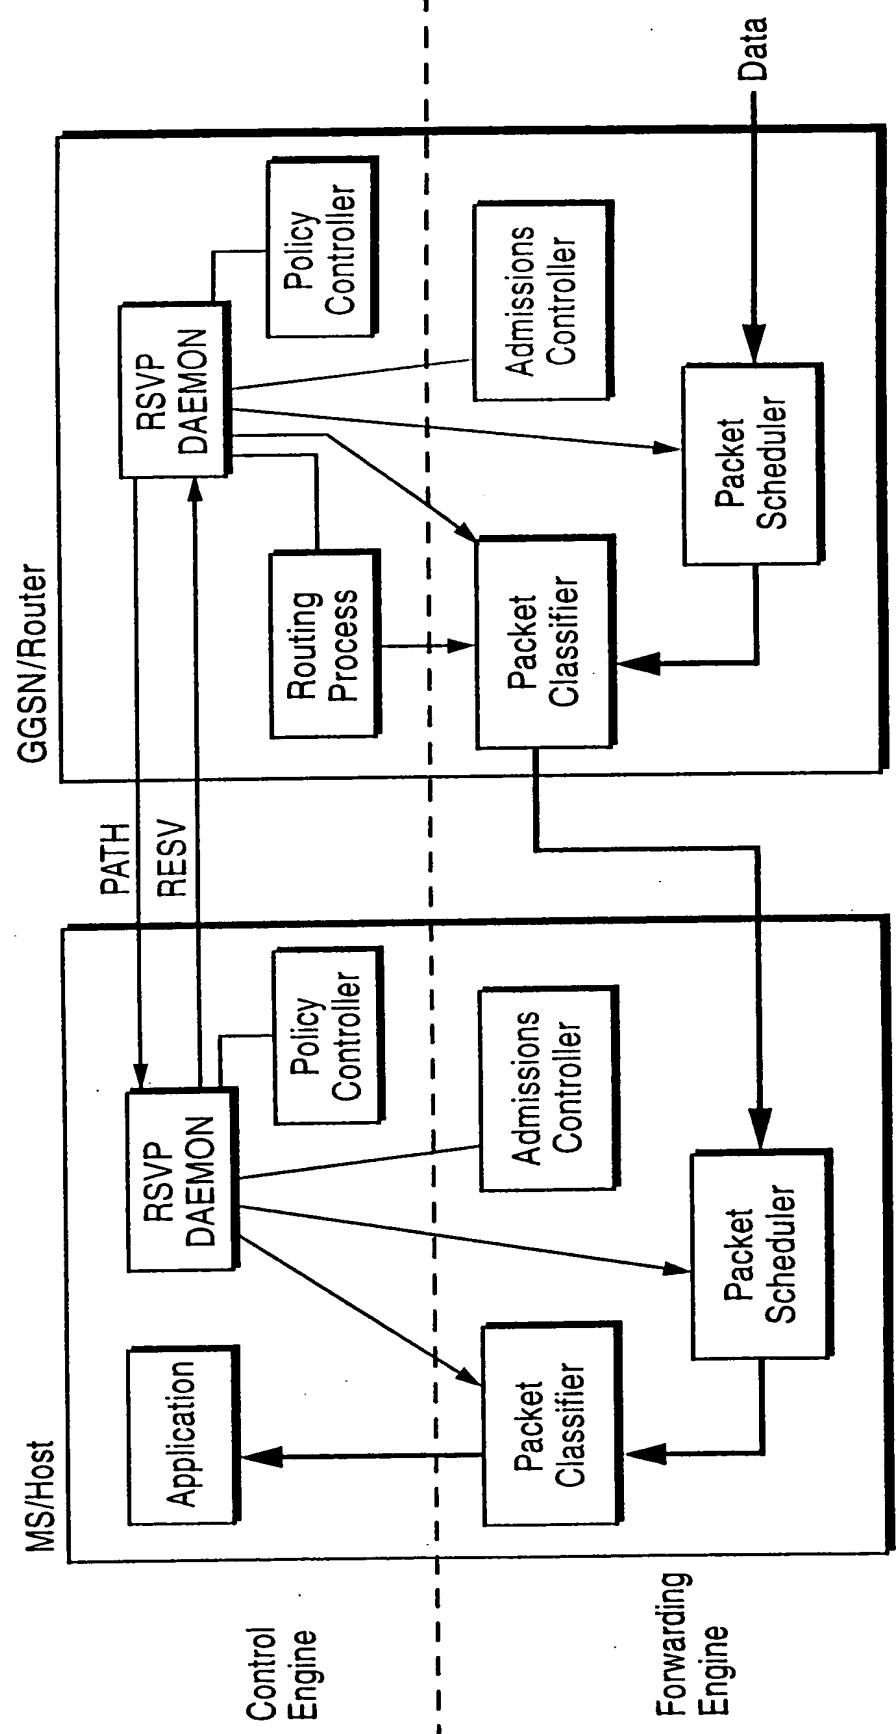


Fig. 14

